













23 37

47

W:30mm

23

70 1

W:30mm

47 W:40mm













order installation track,

light insets + mounting accessories separately

MINITRACK suspended indirect













order installation track, light insets + mounting accessories separately

MINITRACK A Trimless

Size: L1000/2000/3000 mm MATERIAL COLOUR | BK ■ MATERIAL | **⊘** AL |














MINITRACK B Trimless

Size: L1000/2000/3000 mm MATERIAL COLOUR | BK ■ MATERIAL | **⊘** AL |









order installation track,

light insets + mounting accessories separately











SPOT









017001A01

LED Chip: COB Size: φ35x85mm Input: 48VDC Wattage:8W Beam Angle: 15°/23°/36°/60° CCT:2700-5500K RA≥90







017001A02

LED COB

LED Chip: COB Size:2 x φ 35x85mm Input: 48VDC Wattage:2*8W Beam Angle: 15°/23°/36°/60° CCT:2700-5500K RA≥90


















WH













017002A01

LED Chip: COB Size: ϕ 45x110mm Input: 48VDC Wattage:12W Beam Angel: 15°/23°/36°/60° CCT:2700-5500K RA≥90



WH















017002A02

LED Chip: COB Size:2 x φ 45x110mm Input: 48VDC Wattage:2*12W Beam Angel: 7°/15°/23°/36°/60° CCT:2700-5500K RA≥90







017002B01

LED Chip: COB Size: ϕ 45x120mm Input: 48VDC Wattage:8W Beam Angle: 15°/23°/36°/60° CCT:2700-5500K RA≥90













017002B02

LED Chip: COB Size:2 x \phi 45x120mm Input: 48VDC Wattage:2*8W Beam Angle: 15°/23°/36°/60° CCT:2700-5500K RA≥90



Magnetic Track Light











BK



































zigbee











017003A01



017006A01 LED Chip: COB

Size: ϕ 70x130mm Input: 48VDC Wattage:25W Beam Angle: 15°/23°/36°/60° CCT:2700-5500K RA≥90



LED Chip: COB LED Chip: COB Size: \$55x125mm Input: 48VDC Size: ϕ 55x120mm Input: 48VDC Wattage:15W Wattage:15W Beam Angel: 15°-36°/36°-60° Beam Angel: 15°/23°/36°/60° CCT:2700-5500K CCT:2700-5500K RA≥90 RA≥90



Magnetic Track Light

017006B01

LED Chip: COB Size: φ70x145mm Input: 48VDC Wattage:25W Beam Angle: 15°-36°/36°-60° CCT:2700-5500K RA≥90



WH

WH









Tri-color























48 V





























017005A01

LED Chip: COB Size: \$102x155mm Input: 48VDC Wattage:20W Beam Angle: 15°/23°/36°/60° CCT:2700-5500K RA290















017005B01

LED Chip: COB
Size: \$\phi\$ 102x155mm
Input: 48VDC
Wattage: 25W
Beam Angle: wallwasher
CCT: 2700-5500K
RA≥90




















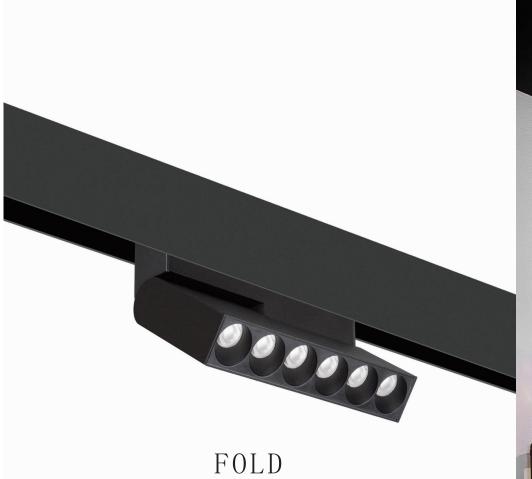












017007A06

LED Chip: SMD Size:117x120mm Input: 48VDC Wattage:10W Beam Angel: 10°/15°/23°/36°/10*30° CCT:2700-5500K RA≥90







017007A12

LED Chip: SMD Size:231x120mm Input: 48VDC Wattage:20W Beam Angel: 10°/15°/23°/36°/10*30° CCT:2700-5500K RA≥90







017007B06


LED Chip: SMD Size:117x120mm Input: 48VDC Wattage:10W Beam Angle: 112° CCT:3000-6000K RA≥90













017007B12

LED Chip: SMD Size:231x120mm Input: 48VDC Wattage:20W Beam Angle: 112° CCT:3000-6000K RA≥90



Magnetic Track Light

WH















IP rating

BK



WH






















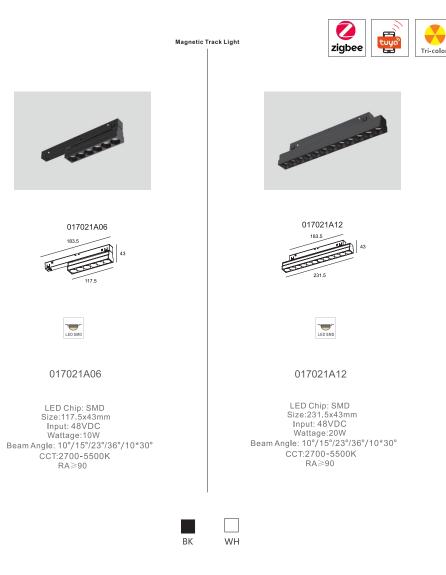

IP rating


CE Certificate

48 V


Tri-color

Excellent visual comfort

Easy installation

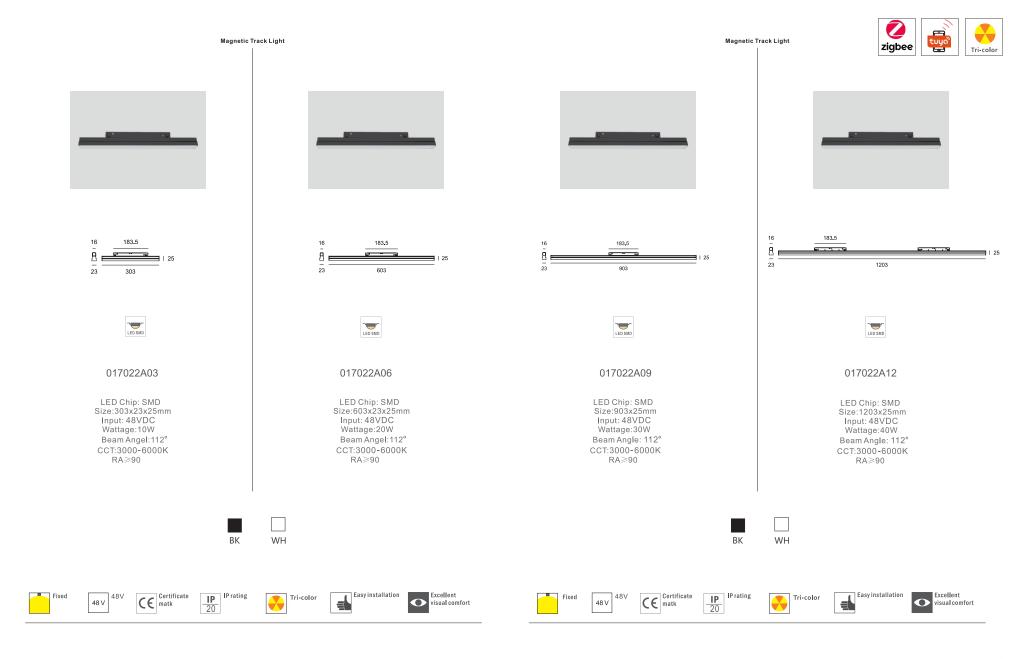



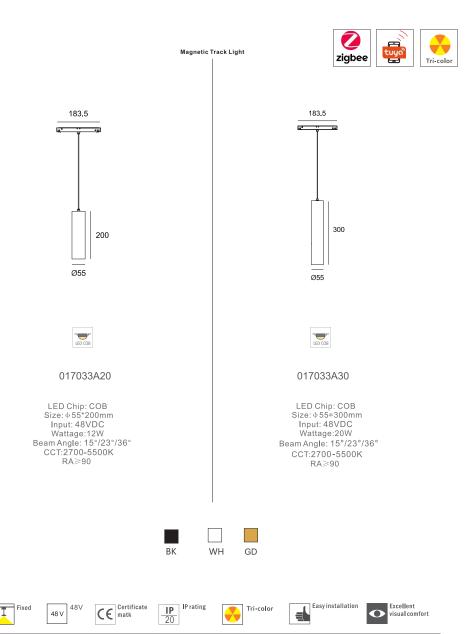

Magnetic Track Light Magnetic Track Light





ROCA23-SPOT-5w-BK

LED chip:COB Size:Φ35*80mm Power:5W Voltage:24VDC Color temperature:2700-5500K Beam angle:20°/30°/40°/60° Color rendering index:≥80/90 Installation: Magnetic Attraction



















ROCA23-SPOT-10w-BK

LED chip:COB Size:Φ50*140mm Power:10W Voltage:24VDC Color temperature:2700-5500K Beam angle:15°/36°/48° Color rendering index:≥80/90
Installation: Magnetic Attraction



WH


























Easy installation



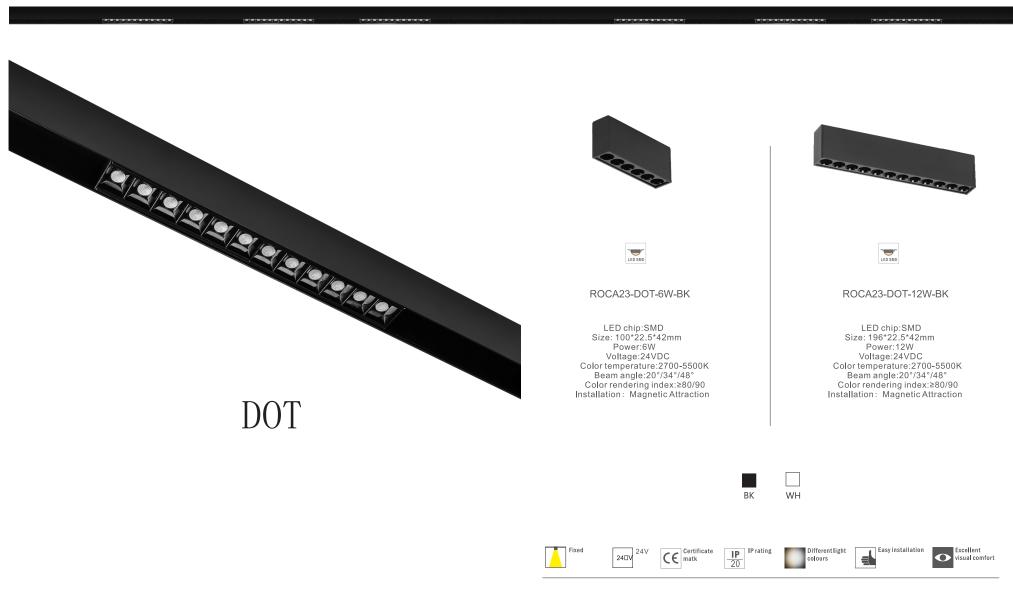







ROCA23-linear-8W-BK

LED chip:SMD
Size: 196*22.5*42mm
Power:8W
Voltage:24VDC
Color temperature:2700-5500K
Beam angle:Diffuse
Color rendering index:≥80/90
Installation: Magnetic Attraction



















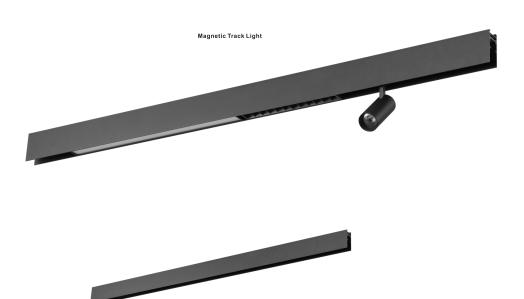



ROCA23-1mt-BK

Siez: 1000 *W27.5*H58.5mm Installation: Surface/Pendant/Recessed

MATERIAL COLOUR | Matt white/black □■|

MATERIAL | ⋈ AL |



ROCA23-RK Siez: 78 *25*H46mm




ROCA23-H-CORNER-BK Siez: 70.5 *70.5 *H58.5mm



ROCA23P-Plate Siez: 60*21*T2.5mm



ROCA23-H-CONN Siez: 100*23.5*H3mm

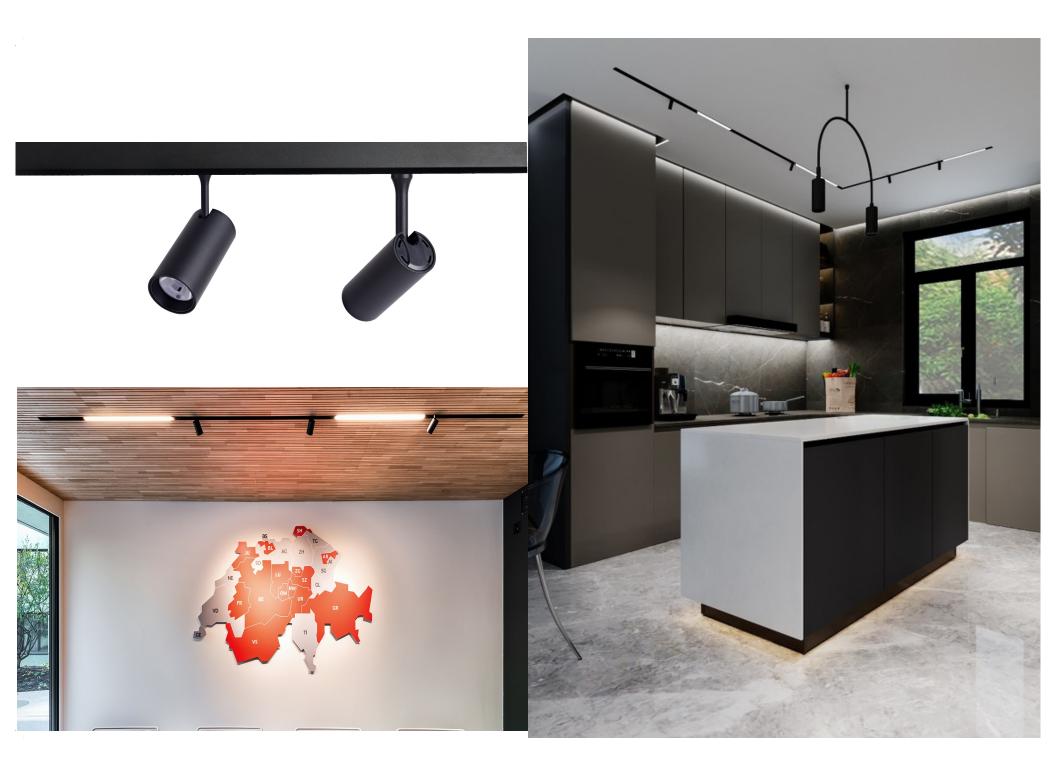







ROCA-62-SPOT-6W-3K

LED chip:COB Power:6W Voltage:48VDC Color temperature: 2700-5500K Beam angle:15°/24°/36° Light efficiency:67 lm/W Color rendering index:≥90 Installation: Track installation









48V











Magnetic Track Light













ROCA-62-SPOT-12W-3K

LED chip:COB Power:12W Voltage:48VDC Color temperature: 2700-5500K Beam angle:15°/24°/36° Light efficiency:72 lm/W Color rendering index:≥90 Installation: Track installation




































ROCA-62-SPOT-10W-3K

LED chip:COB
Power:10W
Voltage:48VDC
Color temperature: 2700-5500K
Beam angle:15°/24°/36°
Light efficiency:55 lm/W
Color rendering index:≥90
Installation: Track installation


































ROCA-62-OPAL-10W-3K

LED chip:SMD
Power:10W
Voltage:48VDC
Color temperature: 2700-5500K
Beam angle:110°
Light efficiency:56 lm/W
Color rendering index:≥90
Installation: Track installation

























ROCA-62-OPAL-20W-3K

LED chip:SMD
Power:20W
Voltage:48VDC
Color temperature: 2700-5500K
Beam angle:110°
Light efficiency:56 lm/W
Color rendering index:≥90
Installation: Track installation






















Magnetic Track Light













ROCA-62-FOLD-6W-3K

LED chip:SMD
Power:6W
Voltage:48VDC
Color temperature: 2700-5500K
Beam angle:24°
Light efficiency:67 lm/W
Color rendering index:≥90
Installation: Track installation









CE Certificate matk

Adjustable


48V













ROCA-62-DOT-6W-3K

LED chip:SMD
Power:6W
Voltage:48VDC
Color temperature: 2700-5500K
Beam angle:24°
Light efficiency:67Im/W
Color rendering index:≥90
Installation: Track installation




















Magnetic Track Light
















ROCA-62-DOT-12W-3K

LED chip:SMD
Power:12W
Voltage:48VDC
Color temperature: 2700-5500K
Beam angle:24°
Light efficiency:67 lm/W
Color rendering index:≥90
Installation:k installation























ROCA-62-1MT-BK

Size:1000*26*H51mm Voltage:48VDC Material:Aluminum Installation: Surface/Recessed

