



LIGHT EFFECT



General Lighting




Accent Lighting




Wall washing Lighting

Lattice




010180A-01

LED Chip: SMD
Size: 45x45x49mm
Cutout: 37x37mm
Input: 220~240VAC
Wattage: 2W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA ≥ 90




37*37mm



010180A-02

LED Chip: SMD
Size: 75x45x49mm
Cutout: 68x37mm
Input: 220~240VAC
Wattage: 4W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA ≥ 90



68*37mm



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color






Excellent visual
comfort



Lattice

Lattice

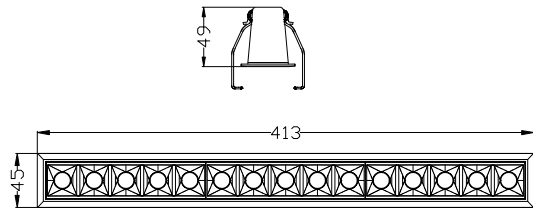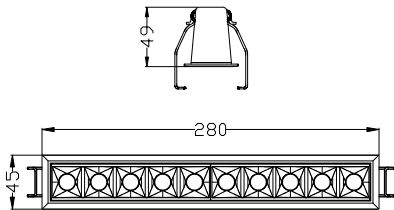

010180A-05


010180A-10

010180A-15


LED Chip: SMD
Size: 147x45x49mm
Cutout: 140x37mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA≥90

LED Chip: SMD
Size: 280x45x49mm
Cutout: 273x37mm
Input: 220~240VAC
Wattage: 20W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA≥90


LED Chip: SMD
Size: 413x45x49mm
Cutout: 405x37mm
Input: 220~240VAC
Wattage: 30W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA≥90





140*37mm



273*37mm



405*37mm



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Fixed



Certificate
mark



IP rating



Different light distribu-
tions




Tri-color



Excellent visual
comfort



Lattice




010180B-01

LED Chip: SMD
Size: 41x72x49mm
Cutout: 41x41mm
Input: 220~240VAC
Wattage: 2W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA ≥ 90



41*41mm



010180B-02

LED Chip: SMD
Size: 71x72x49mm
Cutout: 72x41mm
Input: 220~240VAC
Wattage: 4W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA ≥ 90




72*41mm






Lattice




010180B-05

LED Chip: SMD
Size: 143x72x49mm
Cutout: 144x41mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA≥90



144*41mm



Fixed



Certificate mark



IP rating



Different light distributions




Tri-color




Excellent visual comfort

Lattice

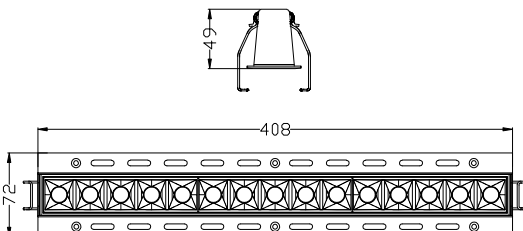


010180B-15

LED Chip: SMD
Size: 408x72x49mm
Cutout: 410x41mm
Input: 220~240VAC
Wattage: 30W
Beam Angle: 15°/ 30°/ 45°
CCT: 2700-5500K
RA≥90



410*41mm



Fixed



Certificate mark



IP rating



Different light distributions




Tri-color




Excellent visual comfort

LAITTE
LITTE

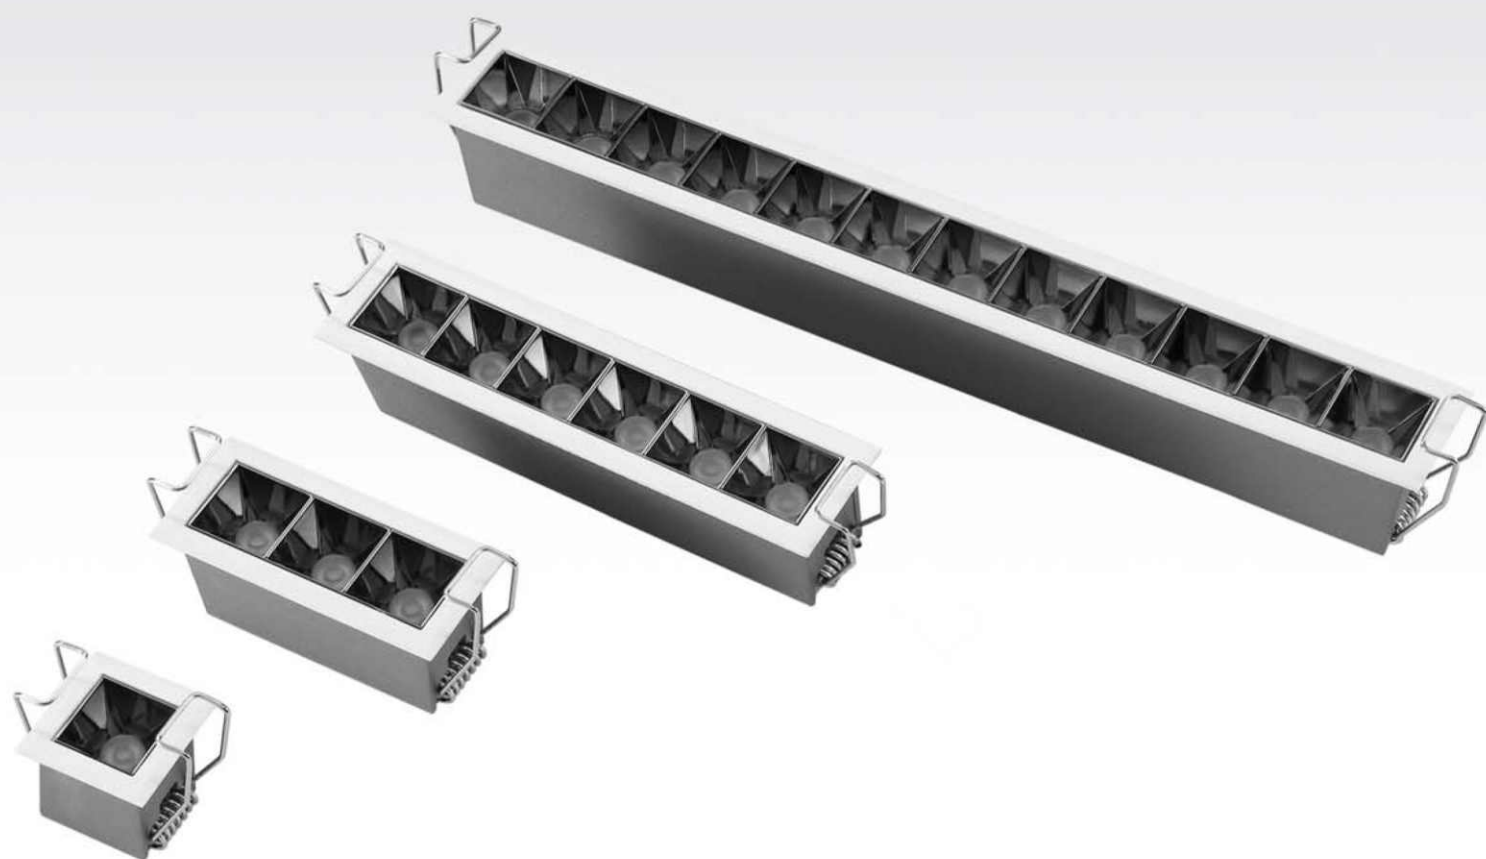


Lattice




001Q-XTD01-WH

LED Chip: SMD
Size:30.5x30.5x35.6mm
Cutout: 26x26mm
Input: 100~240VAC
Wattage:2W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90




26*26mm




001Q-XTD03-WH

LED Chip: SMD
Size:68.5x30.5x35.6mm
Cutout: 64x26mm
Input: 100~240VAC
Wattage:4W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90




64*26mm

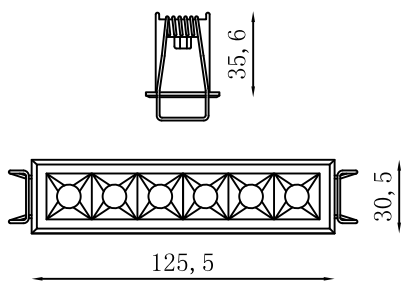


001Q-XTD06-WH

LED Chip: SMD
Size:125.5x30.5x35.6mm
Cutout: 121x26mm
Input: 100~240VAC
Wattage:8W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90




121*26mm

Lattice

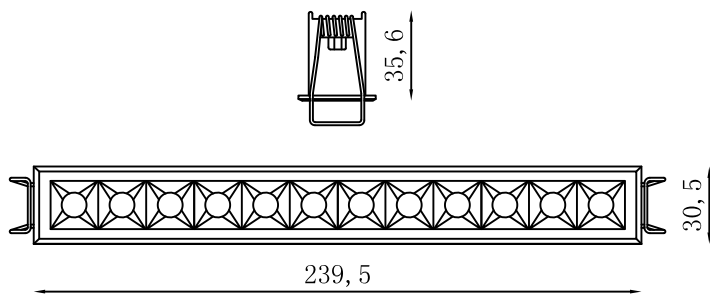


001Q-XTD12-WH

LED Chip: SMD
Size:239.5x30.5x35.6mm
Cutout: 235x26mm
Input: 100~240VAC
Wattage:15W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90



235*26mm



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Fixed



Certificate
mark



IP rating



Different light distribu-
tions




Tri-color






Excellent visual
comfort

Lattice




001Q-XTD04-WH

LED Chip: SMD
Size:49.5x49.5x35.6mm
Cutout: 45x45mm
Input: 100~240VAC
Wattage:5W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90




001Q-XTD09-WH

LED Chip: SMD
Size:68.5x68.5x35.6mm
Cutout: 64x64mm
Input: 100~240VAC
Wattage:10W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90






Lattice




001Q-XTD16-WH

LED Chip: SMD
Size:87.5x87.5x35.6mm
Cutout: 83x83mm
Input: 100~240VAC
Wattage:18W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90



001Q-XTD25-WH

LED Chip: SMD
Size:105.9x105.9x35.6mm
Cutout: 101.5x101.5mm
Input: 100~240VAC
Wattage:25W
Beam Angle:15°/ 24°/ 38°
CCT:3000-6000K
RA≥90



Fixed



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Fixed



Certificate mark



IP rating



Different light distributions



Tri-color




Excellent visual comfort

Lattice Adjustable






Lattice Adjustable




010180C01

LED Chip: SMD
Size: 65*58*48.5mm
Cutout: 55 x 45mm
Input: 220~240VAC
Wattage: 2W
Beam Angle: 15°/30°/45°
CCT: 2700-5500K
RA≥90



010180C02

LED Chip: SMD
Size: 95*58*48.5mm
Cutout: 75 x 45mm
Input: 220~240VAC
Wattage: 4W
Beam Angle: 15°/30°/45°
CCT: 2700-5500K
RA≥90



Adjustable



Certificate mark



IP rating




Different light distributions



Tri-color




Excellent visual comfort




010180C03


LED Chip: SMD
Size: 123*58*48.5mm
Cutout: 110 x 45mm
Input: 220~240VAC
Wattage: 6W
Beam Angel: 15°/30°/45°
CCT: 2700-5500K
RA≥90



110*45mm




15° 30° 45°




010180C05

LED Chip: SMD
Size: 167*58*48.5mm
Cutout: 155 x 45mm
Input: 220~240VAC
Wattage: 10W
Beam Angel: 15°/30°/45°
CCT: 2700-5500K
RA≥90




155*45mm

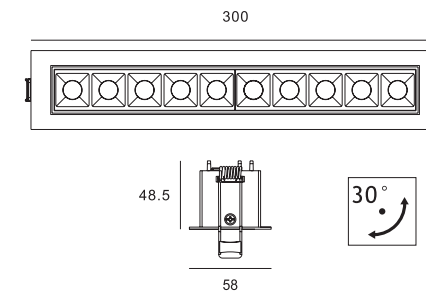


010180C10


LED Chip: SMD
Size: 300*58*48.5mm
Cutout: 290 x 45mm
Input: 220~240VAC
Wattage: 20W
Beam Angel: 15°/30°/45°
CCT: 2700-5500K
RA≥90



290*45mm




15° 30° 45°

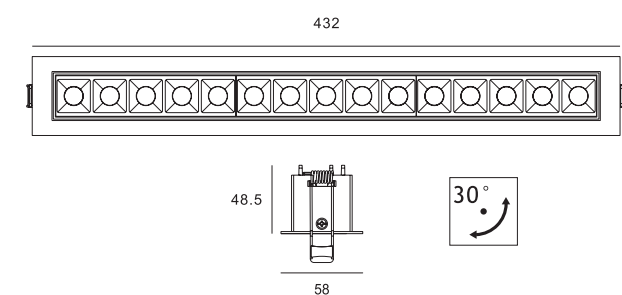

010180C15

LED Chip: SMD
Size: 432*58*48.5mm
Cutout: 420 x 45mm
Input: 220~240VAC
Wattage: 30W
Beam Angel: 15°/30°/45°
CCT: 2700-5500K
RA≥90



420*45mm

Lattice Adjustable

Lattice Adjustable



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions




Tri-color



Excellent visual
comfort





Lattice Trimless




010181B05

LED Chip: SMD
Size: 141*70*56.5mm
Cutout: 145 x 70mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/30°/45°
CCT: 2700-5500K
RA≥90

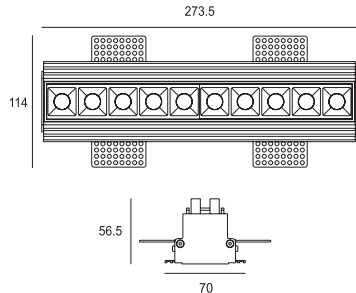


010181B10

LED Chip: SMD
Size: 273.5*70*56.5mm
Cutout: 278 x 70mm
Input: 220~240VAC
Wattage: 20W
Beam Angle: 15°/30°/45°
CCT: 2700-5500K
RA≥90




Lattice Trimless

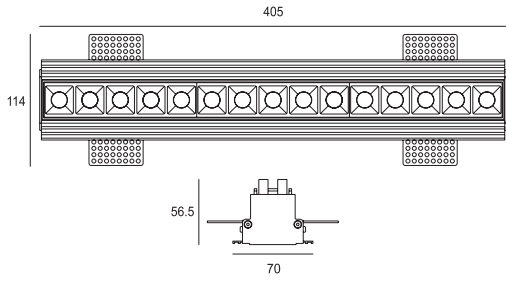

010181B15

LED Chip: SMD
Size: 405*70*56.5mm
Cutout: 410 x 70mm
Input: 220~240VAC
Wattage: 30W
Beam Angle: 15°/30°/45°
CCT: 2700-5500K
RA≥90



Fixed



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Fixed



Certificate mark



IP rating



Different light distributions




Tri-color




Excellent visual comfort

Lattice Tilt

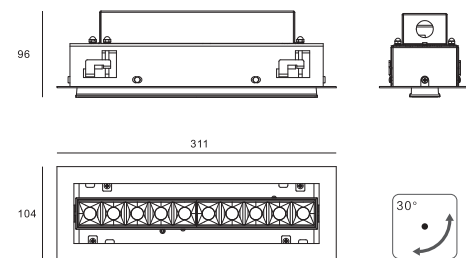

010009A10

LED Chip: SMD
Size:311*104*96mm
Cutout: 295 x 90mm
Input: 220~240VAC
Wattage:20W
Beam Angle: 15°/30°/45°
CCT:2700-5000K
RA≥90



295*90mm



Adjustable



Certificate mark



IP rating



Different light distributions




Tri-color



Excellent visual comfort

Lattice Tilt

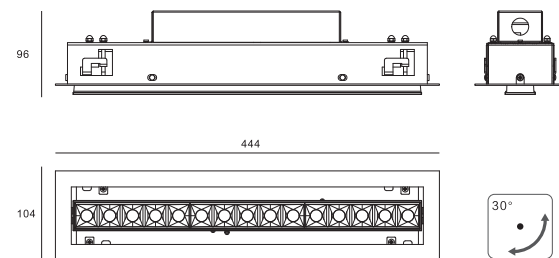

010009A15

LED Chip: SMD
Size:444*104*96mm
Cutout: 425 x 90mm
Input: 220~240VAC
Wattage:30W
Beam Angel: 15°/30°/45°
CCT:2700-5000K
RA≥90



425*90mm



Adjustable



Certificate mark



IP rating



Different light distributions




Tri-color



Excellent visual comfort



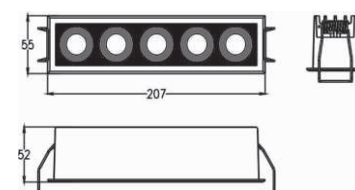


003Q-XTD05-WH

LED Chip: SMD
Size: 207*55*52mm
Cutout: 201 x 49mm
Input: 220~240VAC 50/60Hz
Wattage: 20W
Beam Angle: 15°/24°/38°/50°
50°/50°/70°/70°/35°/70°
CCT: 2700-5000K
RA≥90



201*49mm

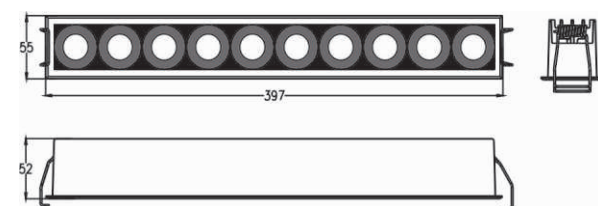

003Q-XTD10-WH

LED Chip: SMD
Size: 397*55*52mm
Cutout: 390 x 49mm
Input: 100~240VAC 50/60Hz
Wattage: 40W
Beam Angle: 15°/24°/38°/50°
50°/50°/70°/70°/35°/70°
CCT: 2700-5000K
RA≥90



390*49mm



Fixed



Certificate
mark



IP rating





Different light distribu-
tions




Tri-color





Excellent visual
comfort

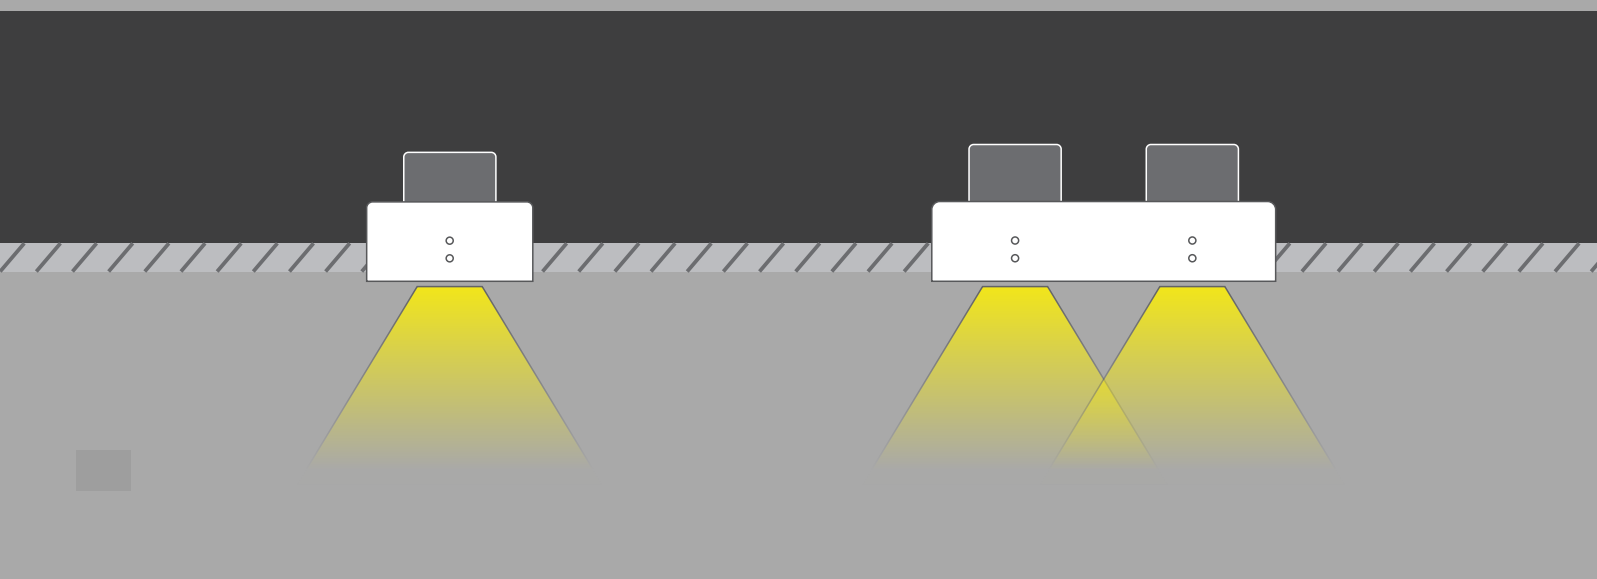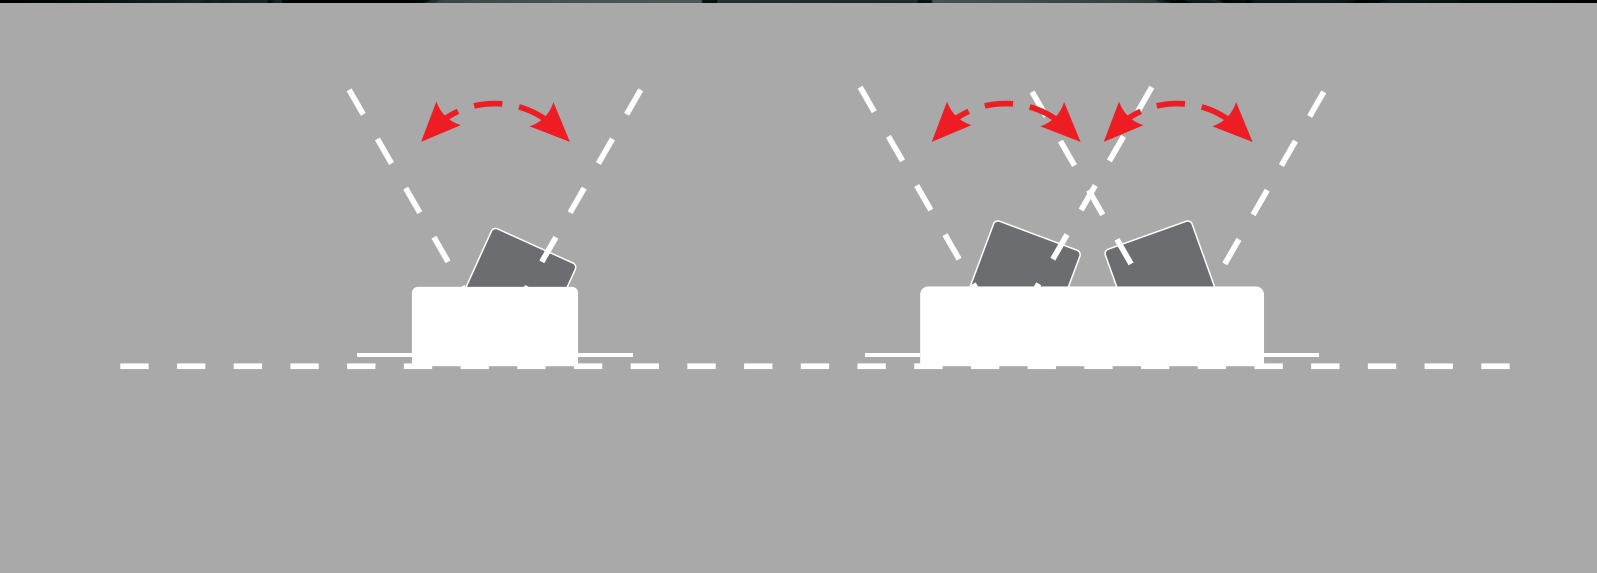

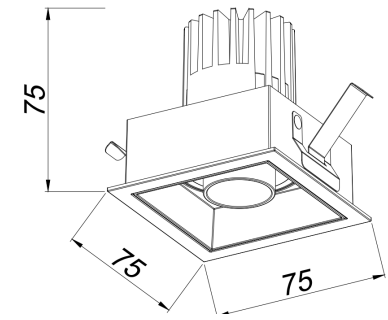


071Q-GL-10W


LED Chip: COB
Size: 75*75*H75mm
Cutout: 70*70mm
Input: 220~240VAC 50Hz/60Hz
Wattage: 10W
Beam Angle: 15°/24°/40°
CCT: 2700-5500K
RA≥90

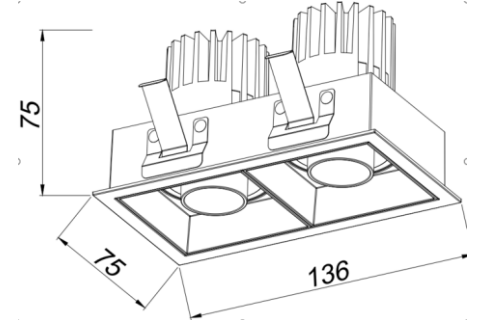

071Q-GL-DUT10W


LED Chip: COB
Size: 136*75*H75mm
Cutout: 130*70mm
Input: 220~240VAC 50Hz/60Hz
Wattage: 2*10W
Beam Angle: 15°/24°/40°
CCT: 2700-5500K
RA≥90






072Q-GL-10W

LED Chip: COB
Size: 65*65*H75mm
Cutout: 70*70mm
Input: 220~240VAC 50Hz/60Hz
Wattage: 10W
Beam Angle: 15°/24°/40°
CCT: 2700-5500K
RA≥90



70x70mm



Adjustable



Certificate
mark



IP rating




Tri-color



Excellent
thermal
management




Excellent
visual comfort

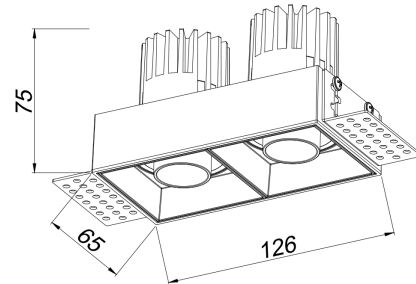


072Q-GL-DUT10W

LED Chip: COB
Size: 166*65*H75mm
Cutout: 130*70mm
Input: 220~240VAC 50Hz/60Hz
Wattage: 2*10W
Beam Angle: 15°/24°/40°
CCT: 2700-5500K
RA≥90



130x70mm



Adjustable



Certificate
mark



IP rating



Tri-color





Excellent
thermal
management




Excellent
visual comfort

LOTUS



047Q-TD-55

LED Chip: SMD
Size: $\varnothing 60 \times 35.5 \text{ mm}$
Cutout: $\varnothing 55 \text{ mm}$
Input: 220~240VAC
Wattage: 6W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color



Excellent visual
comfort



047Q-TD-75

LED Chip: SMD
Size: $\varnothing 85 \times 38 \text{mm}$
Cutout: $\varnothing 75 \text{mm}$
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color



Excellent visual
comfort



047Q-TD-70

LED Chip: SMD
Size: $\varnothing 80 \times 50.5 \text{mm}$
Cutout: $\varnothing 70 \text{mm}$
Input: 220~240VAC
Wattage: 12W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating



Different light distribu-
tions





Tri-color



Excellent visual
comfort





IP54

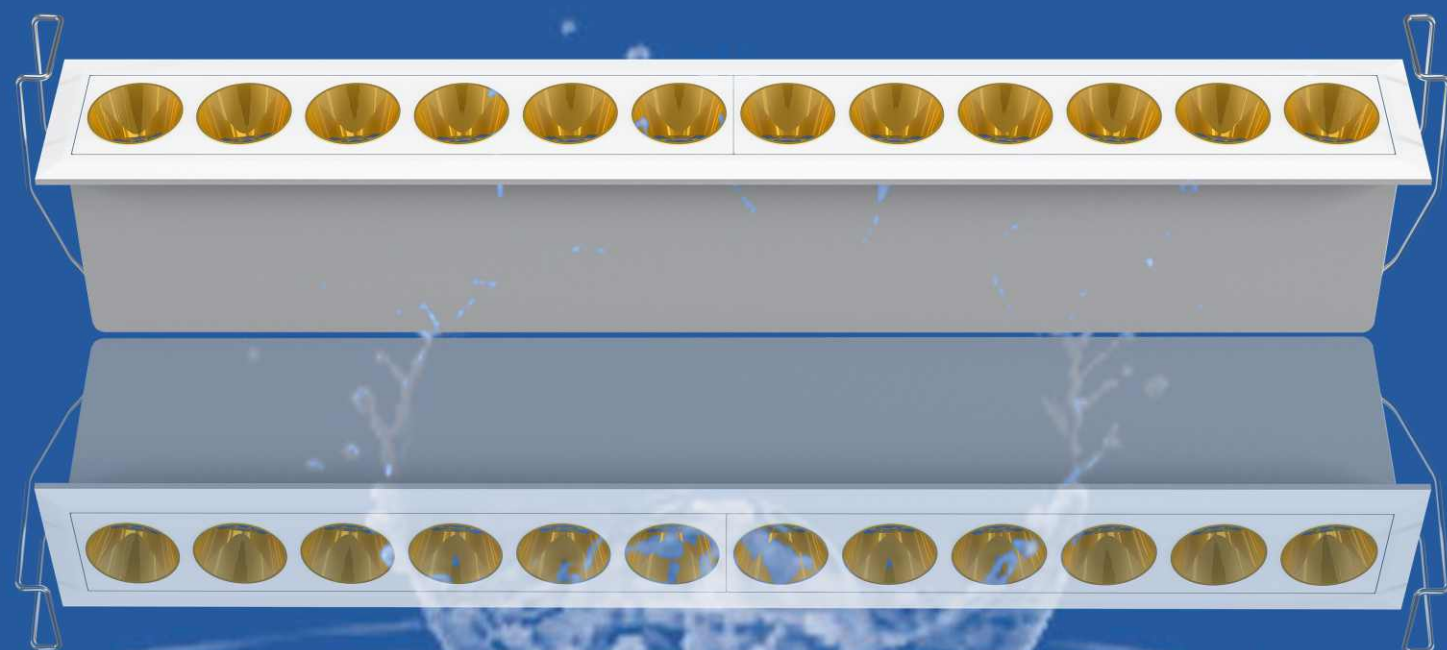

045Q-XTD-3

LED Chip: SMD
Size: 95x45x49.5mm
Cutout: 87 x 37mm
Input: 220~240VAC
Wattage: 6W
Beam Angle: 20°/34°
CCT: 2700-5500K
RA ≥ 90




Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color






Excellent visual
comfort





045Q-XTD-6

LED Chip: SMD
Size: 174x45x49.5mm
Cutout: 163 x 37mm
Input: 220~240VAC
Wattage: 12W
Beam Angle: 20°/34°
CCT: 2700-5500K
RA≥90

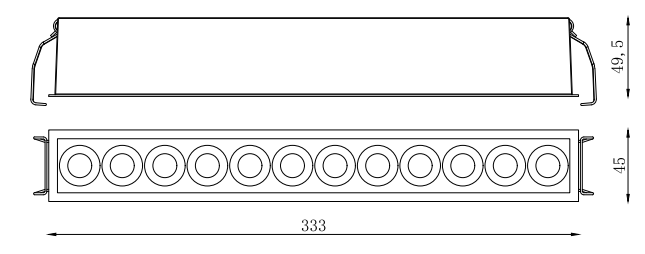

045Q-XTD-12


LED Chip: SMD
Size: 333x45x49.5mm
Cutout: 325x 37mm
Input: 220~240VAC
Wattage: 20W
Beam Angle: 20°/34°
CCT: 2700-5500K
RA≥90






Adjustable



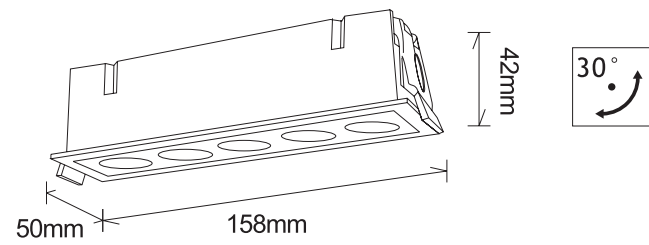

054Q-AJ-12W

LED Chip: SMD
Size: 158 x 50 x 42mm
Cutout: 150 x 45mm
Input: 220~240VAC
Wattage: 12W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA≥90



Adjustable



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color





Excellent visual
comfort

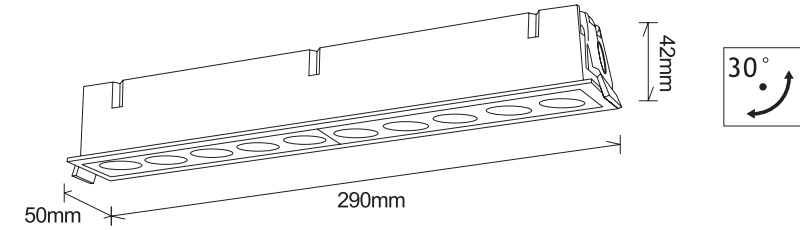

054Q-AJ-24W

LED Chip: SMD
Size: 290 x 50 x 42mm
Cutout: 280 x 45mm
Input: 220~240VAC
Wattage: 24W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA≥90



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions






Tri-color



Excellent visual
comfort





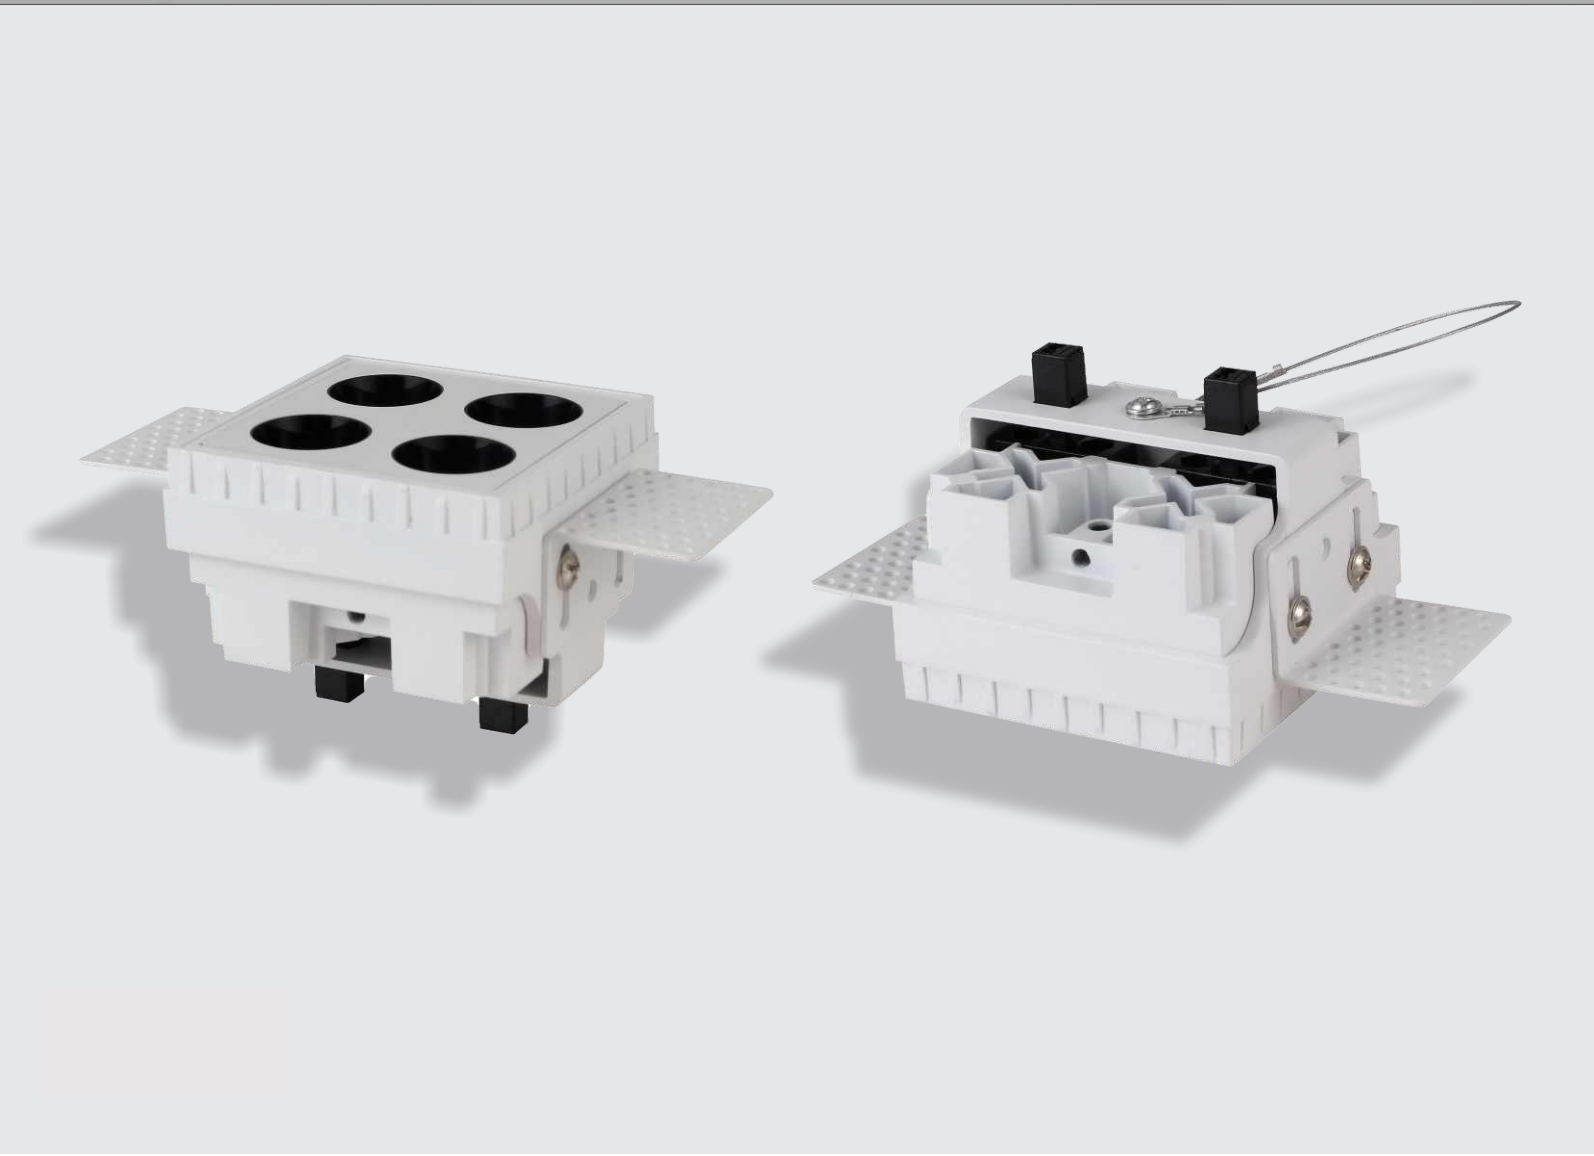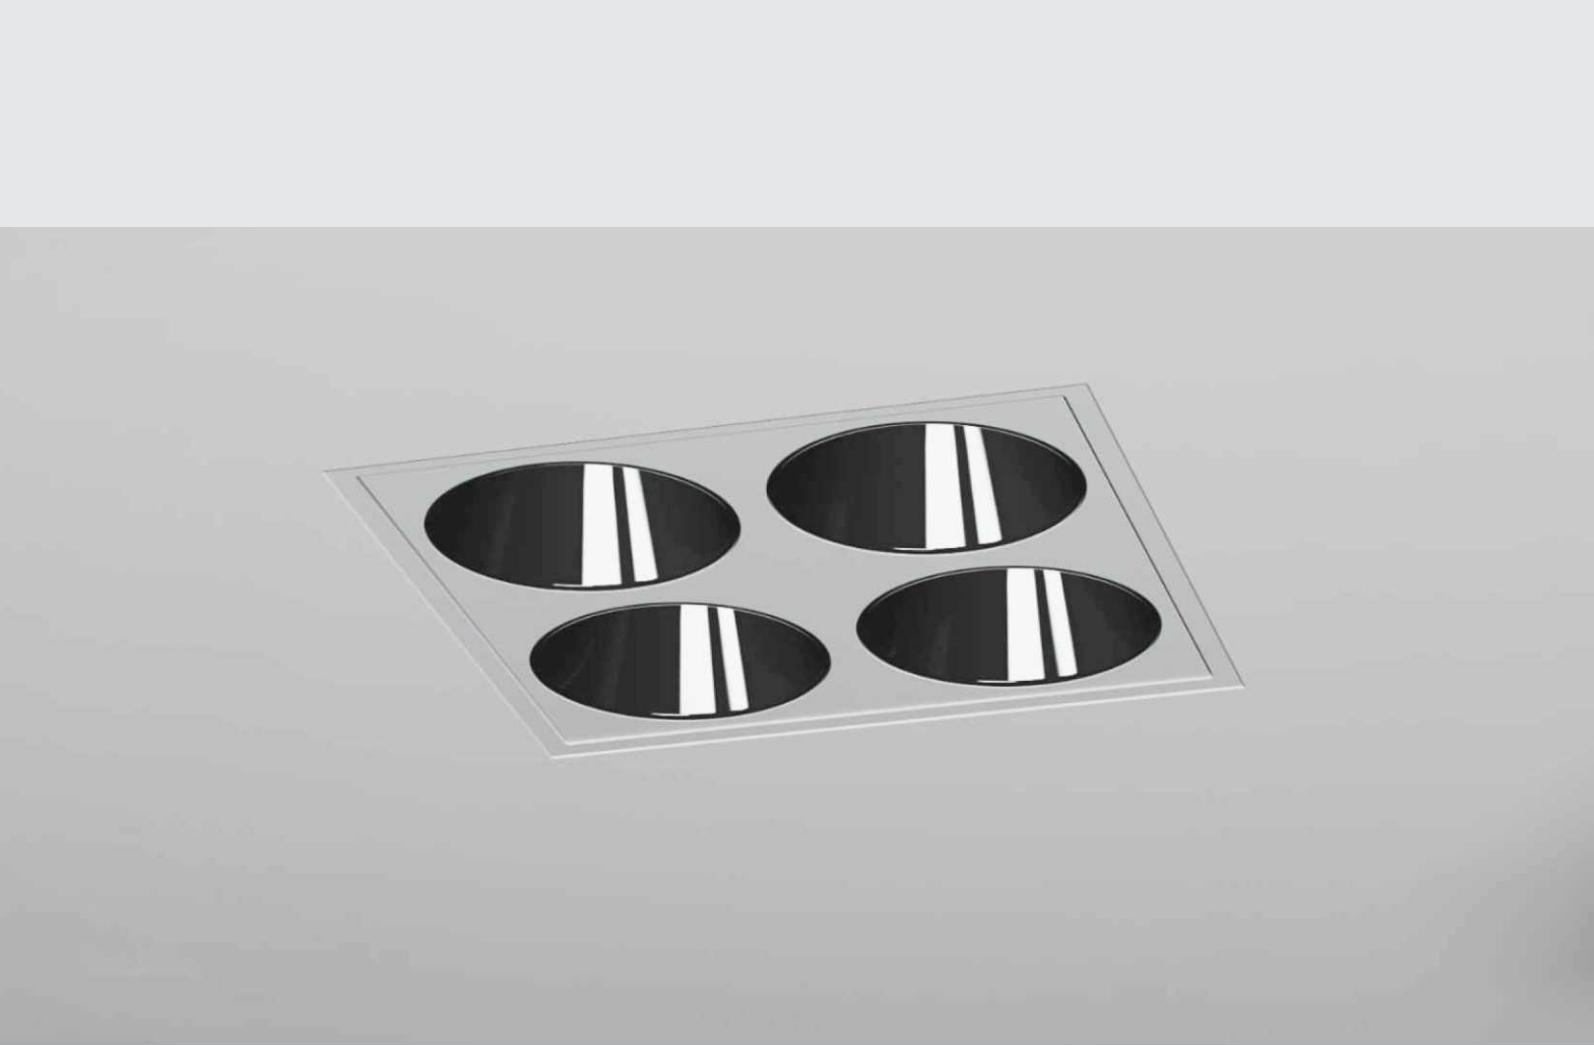

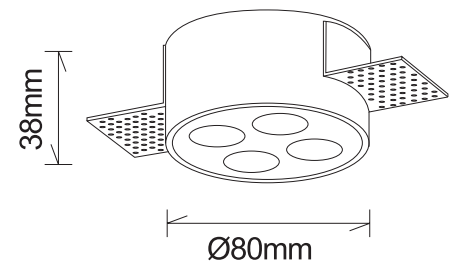


055Y-XTD-4R

LED Chip: SMD
Size: Ø80x38mm
Cutout: Ø80mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA ≥ 90

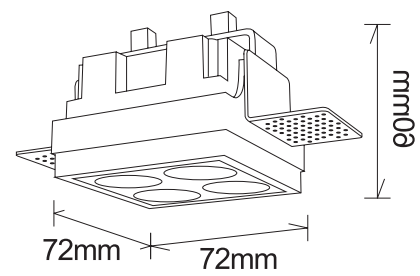

055Y-XTD-4S







LED Chip: SMD
Size: 72x72x60mm
Cutout: 72x 72mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/24°/38°
CCT: 2700-5500K
RA ≥ 90








012Q-XTD03

LED Chip: SMD
Size: 73x33x32,5mm
Cutout: 68 x 25mm
Input: 220~240VAC
Wattage: 5W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA≥90



012Q-XTD06

LED Chip: SMD
Size: 133.5x33x32.5mm
Cutout: 127x 25mm
Input: 220~240VAC
Wattage: 12W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA≥90

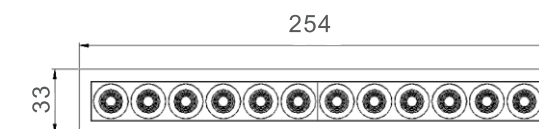

012Q-XTD12

LED Chip: SMD
Size: 254.5x34x32.5mm
Cutout: 248 x 25mm
Input: 220~240VAC
Wattage: 18W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA≥90



Grille spotlight series



Fixed



Certificate
mark



IP rating



Tri-color



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating




Tri-color



Excellent
thermal
management




Excellent
visual comfort

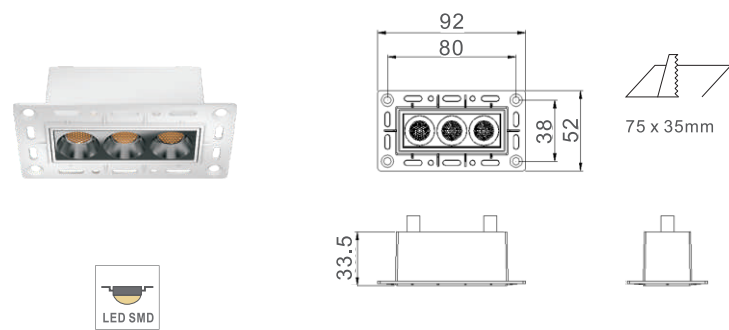

013Q-XTD03

LED Chip: SMD
Size: 92x52x33.5mm
Cutout: 75 x 35mm
Input: 220~240VAC
Wattage: 5W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating



Tri-color




Excellent
thermal
management





Excellent
visual
comfort

Grille spotlight series

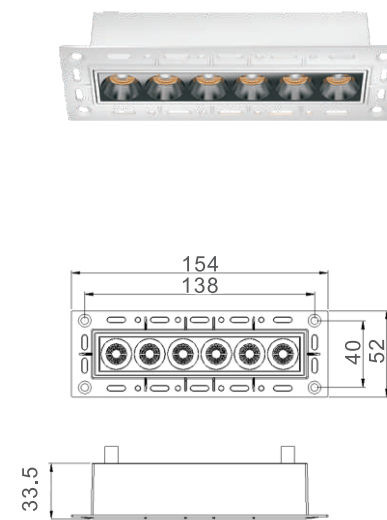

013Q-XTD06

LED Chip: SMD
Size: 154x52x33.5mm
Cutout: 135 x 35mm
Input: 220~240VAC
Wattage: 12W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA ≥ 90

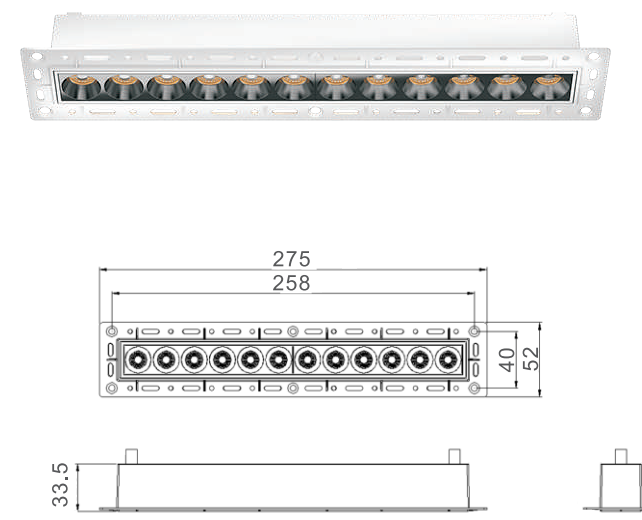

013Q-XTD12

LED Chip: SMD
Size: 275x52x33.5mm
Cutout: 255 x 35mm
Input: 220~240VAC
Wattage: 18W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating




Tri-color



Excellent
thermal
management



Excellent
visual
comfort

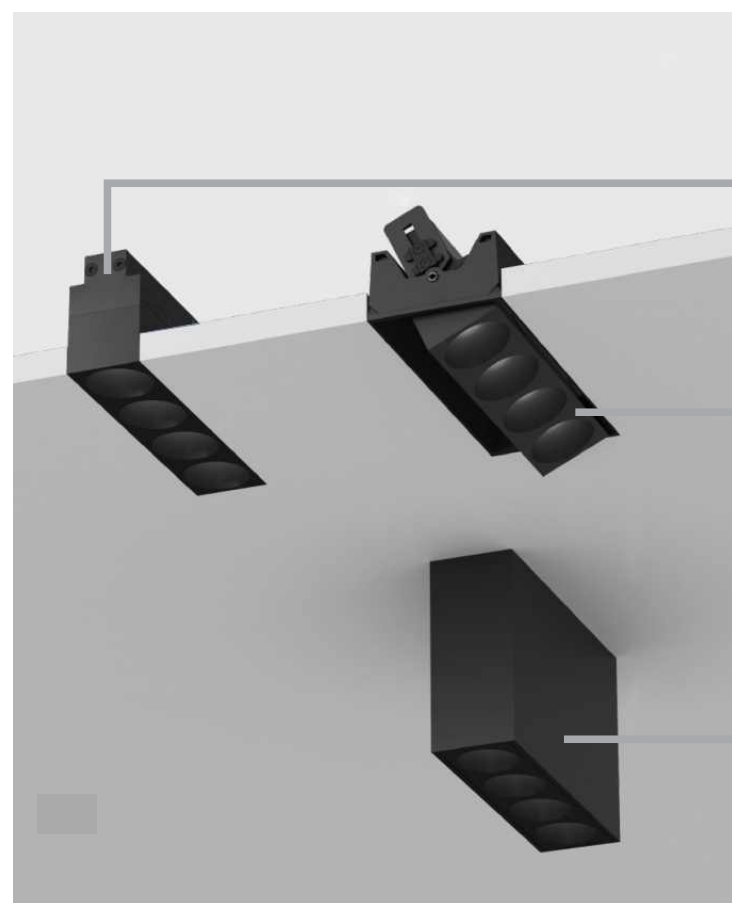


Fixed

Adjustable



Surface



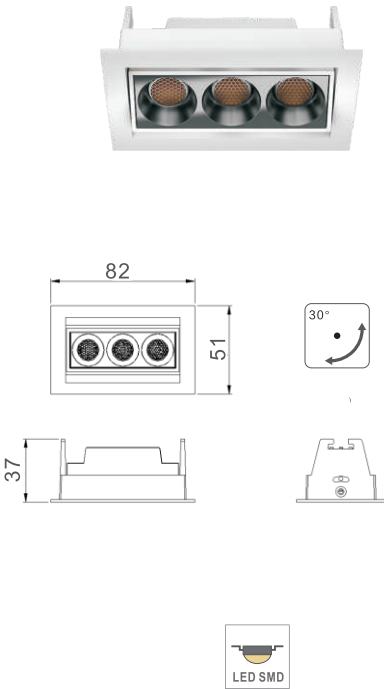



014Q-XTD03

LED Chip: SMD
Size: 82x51x37mm
Cutout: 78 x 42mm
Input: 220~240VAC
Wattage: 5W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA ≥ 90

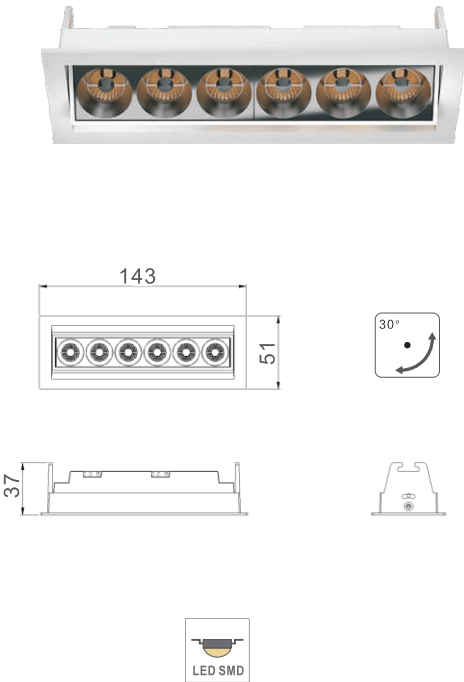



014Q-XTD06

LED Chip: SMD
Size: 143x51x37mm
Cutout: 137 x 42mm
Input: 220~240VAC
Wattage: 12W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA ≥ 90

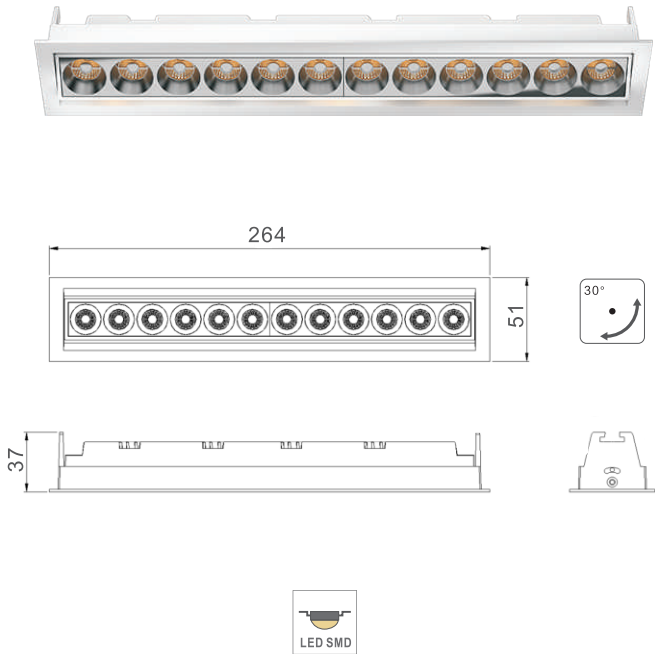

014Q-XTD12

LED Chip: SMD
Size: 264x51x37mm
Cutout: 258 x 42mm
Input: 220~240VAC
Wattage: 18W
Beam Angle: 24°/50°
CCT: 2700-5500K
RA ≥ 90



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort