


066Q-SD-55

LED Chip: COB
Size: $\varnothing 65 \times H80$ mm
Cut out: $\varnothing 55$ mm
Input: 100-240VAC 50/60Hz
Wattage: 5-7W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA ≥ 90



Adjustable



Certificate mark



IP rating




Different light distributions



Tri-color




Excellent visual comfort

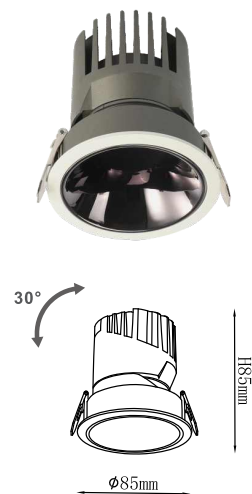


066Q-SD-75



LED Chip: COB
Size: $\varnothing 85 \times H 85 \text{mm}$
Cut out: $\varnothing 75 \text{mm}$
Input: 100-240VAC 50/60Hz
Wattage: 12W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA ≥ 90

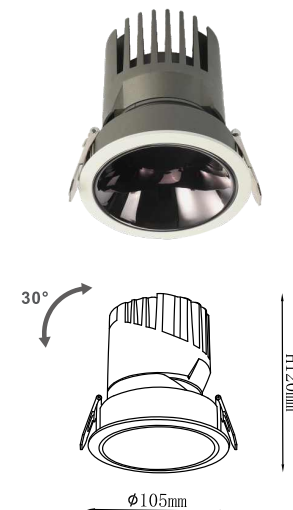

066Q-TD-95


LED Chip: COB
Size: $\varnothing 105 \times H 120 \text{mm}$
Cut out: $\varnothing 95 \text{mm}$
Input: 100-240VAC 50/60Hz
Wattage: 20-30W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA ≥ 90



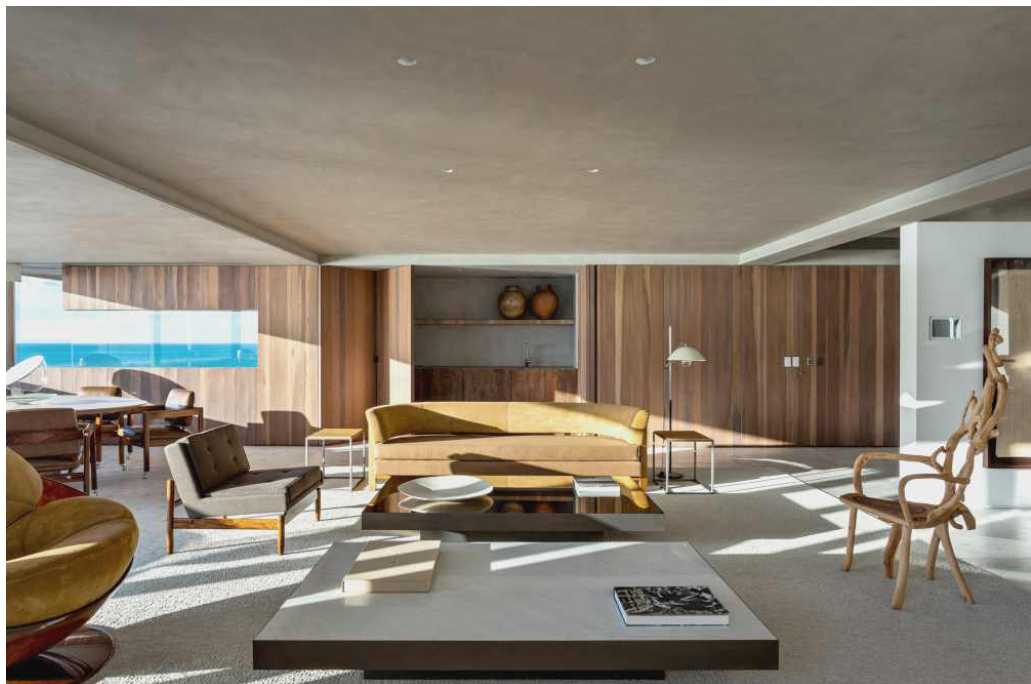

066Q-SD-W75

LED Chip: COB
Size: $\varnothing 105 \times H90$ mm
Cut out: $\varnothing 75$ mm
Input: 100-240VAC 50/60Hz
Wattage: 15W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA ≥ 90



Adjustable



Certificate mark



IP rating






Different light distributions



Tri-color



Excellent visual comfort

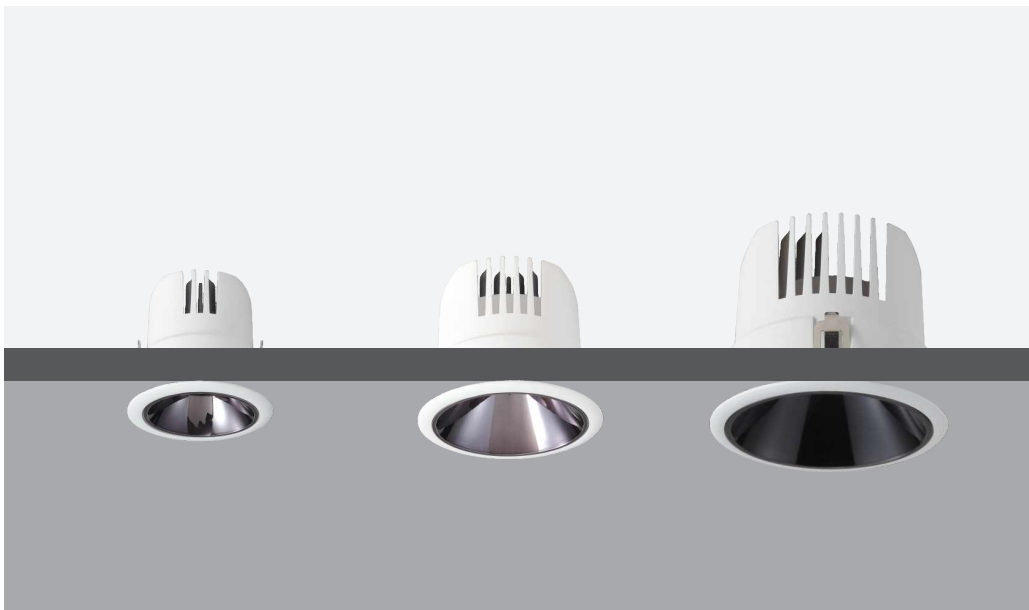

059Q-SD-7W

LED Chip: Osram
Size: $\phi 62 \times 60\text{mm}$
Cutout: $\phi 55\text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 7W
Beam Angle: 18°
CCT: 2700-5000K
RA $\geq$ 90



Fixed



Certificate mark



IP rating




Different light distributions



Tri-color



Excellent visual comfort



059Q-SD-12W

LED Chip: Osram
Size: ϕ 83*70mm
Cutout: ϕ 75mm
Input: 220~240VAC 50/60Hz
Wattage: 12W
Beam Angle: 24°
CCT: 2700-5000K
RA $\geq$ 90



24°



Fixed



Certificate mark



IP rating




Different light distributions



Tri-color



Excellent visual comfort



059Q-SD-20W

LED Chip: Osram
Size: ϕ 103*88mm
Cutout: ϕ 95mm
Input: 220~240VAC 50/60Hz
Wattage: 20W
Beam Angle: 33°
CCT: 2700-5000K
RA $\geq$ 90



33°



Fixed



Certificate mark



IP rating




Different light distributions



Tri-color



Excellent visual comfort




021Q-SD-05

LED Chip: COB
Size: $\Phi 61 \times 80 \text{mm}$
Cutout: $\Phi 55 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 5-8W
Beam Angel: 15°/24°/36°/50°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 55 \text{mm}$




021Q-SD-05-C

LED Chip: COB
Size: $\Phi 61 \times 80 \text{mm}$
Cutout: $\Phi 55 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 5-8W
Beam Angel: 15°/24°/36°/50°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 55 \text{mm}$




021Q-SD-12

LED Chip: COB
Size: $\Phi 83.5 \times 95 \text{mm}$
Cutout: $\Phi 75 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 10-15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 75 \text{mm}$



021Q-SD-12-C

LED Chip: COB
Size: $\Phi 83.5 \times 95 \text{mm}$
Cutout: $\Phi 75 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 10-15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 75 \text{mm}$



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Adjustable



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color



Excellent visual
comfort




021Q-SD-25

LED Chip: COB
Size: $\Phi 112.5 \times 125\text{mm}$
Cutout: $\Phi 100\text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 18~25W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 100\text{mm}$




021Q-SD-25-C

LED Chip: COB
Size: $\Phi 112.5 \times 125\text{mm}$
Cutout: $\Phi 100\text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 18~25W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 100\text{mm}$




022Q-SD-05

LED Chip: COB
Size: $\Phi 75 \times 80\text{mm}$
Cutout: $\Phi 55\text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 5~8W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



$\Phi 55\text{mm}$




022Q-SD-05-C

LED Chip: COB
Size: $\Phi 75 \times 80\text{mm}$
Cutout: $\Phi 55\text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 5~8W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90




$\Phi 55\text{mm}$






022Q-SD-12

LED Chip: COB
Size: $\Phi 100 \times 95 \text{mm}$
Cutout: $\Phi 75 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 10~15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90




022Q-SD-12-C

LED Chip: COB
Size: $\Phi 100 \times 95 \text{mm}$
Cutout: $\Phi 75 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 10~15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



022Q-SD-25


LED Chip: COB
Size: $\Phi 130 \times 125 \text{mm}$
Cutout: $\Phi 100 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 18~25W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90



022Q-SD-25-C


LED Chip: COB
Size: $\Phi 130 \times 125 \text{mm}$
Cutout: $\Phi 100 \text{mm}$
Input: 220~240VAC 50/60Hz
Wattage: 18~25W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA $\geq$ 90






RC-MOD-RE1201

LED Chip: COB
Size: $\Phi 110 \times 65 \text{mm}$
Cutout: $\Phi 100 \text{mm}$
Input: 220~240VAC
Wattage: 12W
Beam Angel: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90




RC-MOD-RE2001

LED Chip: COB
Size: $\Phi 110 \times 85 \text{mm}$
Cutout: $\Phi 100 \text{mm}$
Input: 220~240VAC
Wattage: 20W
Beam Angel: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90



RC-MOD-RE1202

LED Chip: COB
Size: $220 \times 110 \times 85 \text{mm}$
Cutout: $2 \times \Phi 100 - 110 \text{mm}$
Input: 220~240VAC
Wattage: $2 \times 12 \text{W}$
Beam Angel: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90



RC-MOD-RE2002

LED Chip: COB
Size: $220 \times 110 \times 85 \text{mm}$
Cutout: $2 \times \Phi 100 - 110 \text{mm}$
Input: 220~240VAC
Wattage: $2 \times 20 \text{W}$
Beam Angel: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90



Adjustable



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Adjustable



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color




Excellent visual
comfort




RC-MOD-RE1203

LED Chip: COB
Size: 110x110x65mm
Cutout: $\Phi 100$ mm
Input: 220~240VAC
Wattage: 12W
Beam Angle: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90




RC-MOD-RE2003

LED Chip: COB
Size: 110x110x85mm
Cutout: $\Phi 100$ mm
Input: 220~240VAC
Wattage: 20W
Beam Angle: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90



RC-MOD-RE1204

LED Chip: COB
Size: 220x110x65mm
Cutout: 210x100mm
Input: 220~240VAC
Wattage: 2x12W
Beam Angle: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90



RC-MOD-RE2004

LED Chip: COB
Size: 220x110x85mm
Cutout: 210x100mm
Input: 220~240VAC
Wattage: 2x20W
Beam Angle: 15°/24°/36°/60°
CCT: 2700-5500K
RA $\geq$ 90



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Adjustable



Certificate mark



IP rating



Different light distributions




Tri-color



Excellent visual comfort


MINI SPOT

Light



024Q-SD25-02

LED Chip: SMD
Size: $\Phi 30 \times 24$ mm
Cutout: $\Phi 25$ mm
Input: 220~240VAC
Wattage: 2W
Light efficiency: 40lm/W
Beam Angel: 15°/27°/60°
CCT: 2700-5500K
RA $\geq$ 90



024Q-SD35-04

LED Chip: SMD
Size: $\Phi 40 \times 30.8$ mm
Cutout: $\Phi 35$ mm
Input: 220~240VAC
Wattage: 4W
Light efficiency: 40lm/W
Beam Angel: 15°/25°/50°
CCT: 2700-5500K
RA $\geq$ 90



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color




Excellent visual
comfort



024Q-SD50-05

LED Chip: SMD
Size: $\Phi 55 \times 51.4$ mm
Cutout: $\Phi 50$ mm
Input: 220~240VAC
Wattage: 5W
Light efficiency: 45lm/W
Beam Angel: 8°/25°/45°
CCT: 2700-5500K
RA $\geq$ 90



024Q-SD60-08

LED Chip: COB
Size: $\Phi 65 \times 61.7$ mm
Cutout: $\Phi 60$ mm
Input: 220~240VAC
Wattage: 8W
Light efficiency: 60lm/W
Beam Angel: 20°/45°
CCT: 2700-5500K
RA $\geq$ 90



024Q-SD70-12

LED Chip: COB
Size: $\Phi 75 \times 70$ mm
Cutout: $\Phi 70$ mm
Input: 220~240VAC
Wattage: 12W
Light efficiency: 65lm/W
Beam Angel: 15°/24°/45°
CCT: 2700-5500K
RA $\geq$ 90



Fixed



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Fixed



Certificate mark



IP rating




Different light distributions



Tri-color



Excellent visual comfort




023Q-SD-12A

LED Chip: COB
Size: Φ83.5x95mm
Cutout: Φ75mm
Input: 220~240VAC 50/60Hz
Wattage: 10-15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA≥90



Φ75mm




023Q-SD-12B

LED Chip: COB
Size: Φ83.5x95mm
Cutout: Φ75mm
Input: 220~240VAC 50/60Hz
Wattage: 10-15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA≥90



Φ75mm




023Q-SD-12C

LED Chip: COB
Size: Φ100x95mm
Cutout: Φ75mm
Input: 220~240VAC 50/60Hz
Wattage: 10-15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA≥90



Φ75mm




023Q-SD-12D

LED Chip: COB
Size: Φ100x95mm
Cutout: Φ75mm
Input: 220~240VAC 50/60Hz
Wattage: 10-15W
Beam Angel: 15°/24°/36°/55°
CCT: 2700-5500K
RA≥90




Φ75mm





056Q-SD-40

LED Chip: COB
Size: 45x90mm
Cutout: 40mm
Input: 220~240VAC
Wattage: 7W
Beam Angle: 24°/36°
CCT: 2700-5500K
RA≥90




056Y-SD-40

LED Chip: COB
Size: 65x90mm
Cutout: 40mm
Input: 220~240VAC
Wattage: 7W
Beam Angle: 24°/36°
CCT: 2700-5500K
RA≥90



Φ: 40mm





ROCA-08-6w

LED Chip: COB
Cutout: $\Phi 55\text{mm}$
Input: 220~240VAC
Wattsge: 6W
Beam Angel: 15°/24°/36°
Color: Sand white/black
CCT: 2700-5500K
RA $\geq$ 90



Adjustable



Certificate
mark



IP rating




Different light
colours



Excellent
thermal
management



Excellent
visual comfort




ROCA-26-7W

LED Chip: COB
Size: 53.5x53.5x H82mm
Cutout: 58x58mm
Input: 220~240VAC 50/60Hz
Wattage: 7W
Beam Angel: 24°
CCT: 2700-5500K
IP Rating: IP20
RA: 90



58x58mm




ROCA-01-10W

LED Chip: COB
Size: Ø58x H108mm
Cutout: Ø55mm
Input: 220~240VAC 50/60Hz
Wattage: 10W
Beam Angel: 24°
CCT: 2700-5500K
IP Rating: IP20
RA: 90



Ø55mm





Ø82




ROCAPZ-75

LED Chip: COB
Size: 82x H76mm
Cutout: Ø75mm
Input: 220~240VAC
Wattsge: 12W
Beam Angel: 15°/24°/36°
Color: Sand white/black
CCT: 2700-5500K
RA≥90



Φ75mm



Ø98



ROCAPZ-95

LED Chip: COB
Size: 98x H99mm
Cutout: Ø95mm
Input: 220~240VAC
Wattsge: 18W
Beam Angel: 15°/24°/36°
Color: Sand white/black
CCT: 2700-5500K
RA≥90



Φ95mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Adjustable



Certificate
mark



IP rating




Different light
colours



Excellent
thermal
management



Excellent
visual comfort




ROCAPZ-85

LED Chip: COB
 Size: 147x H85mm
 Cutout: $\Phi 85$ mm
 Input: 220~240VAC
 Wattsge: 12W
 Beam Angel: 15°/24°/36°
 Color: Sand white/black
 CCT: 2700-5500K
 RA ≥ 90



$\Phi 85$ mm



ROCAPZ-105

LED Chip: COB
 Size: 180x H107mm
 Cutout: $\Phi 105$ mm
 Input: 220~240VAC
 Wattsge: 24W
 Beam Angel: 15°/24°/36°
 Color: Sand white/black
 CCT: 2700-5500K
 RA ≥ 90



$\Phi 105$ mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management



Excellent
visual comfort

Trimless Recessed





ROCA07

LED Chip: GU10
Size: Ø70 x H49mm
Cutout: Ø75mm
Color: Black/White
Lamp Material: Aluminum
Wattage: MAX. 50W
IP Rating: IP20
Install: Recessed



BK ■ WH □



Fixed



Certificate mark



IP rating




Different light distributions



Excellent thermal management



Excellent visual comfort



ROCA09

LED Chip: GU10
Size: 70x70 x H49mm
Cutout: 75x75mm
Color: Black/White
Lamp Material: Aluminum
Wattage: MAX. 50W
IP Rating: IP20
Install: Recessed



BK ■ WH □



Fixed



Certificate mark



IP rating




Different light distributions



Excellent thermal management



Excellent visual comfort



ROCA07

LED Chip: GU10
Size: Ø70 x H49mm
Cutout: Ø75mm/70°70mm
Color: Black/White
Lamp Material: Aluminum
Wattage: MAX.50W
IP Rating: IP20
Install: Recessed



Φ75mm/70°70mm

BK ■ WH □



Fixed



Certificate mark



IP rating




Different light distributions



Excellent thermal management



Excellent visual comfort



ROCA10

LED Chip: GU10
Size: 70.5x70.5 x H49mm
Cutout: 73x73mm/73°80mm
Color: Black/White
Lamp Material: Aluminum
Wattage: MAX.50W
IP Rating: IP20
Install: Recessed



73x73mm/73°80mm

BK ■ WH □



Fixed



Certificate mark



IP rating



Different light distributions



Excellent thermal management



Excellent visual comfort