


LOTUS



046M-TD-65

LED Chip: SMD
Size: 65x65x64mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 24°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color





Excellent visual
comfort



046M-TD-125

LED Chip: SMD
Size: 125x65x64mm
Input: 220~240VAC
Wattage: 15W
Beam Angle: 24°
CCT: 2700-5500K
RA ≥ 90



046M-TD-185

LED Chip: SMD
Size: 185x65x64mm
Input: 220~240VAC
Wattage: 24W
Beam Angle: 24°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Fixed



Certificate
mark



IP rating





Different light distribu-
tions



Tri-color




Excellent visual
comfort

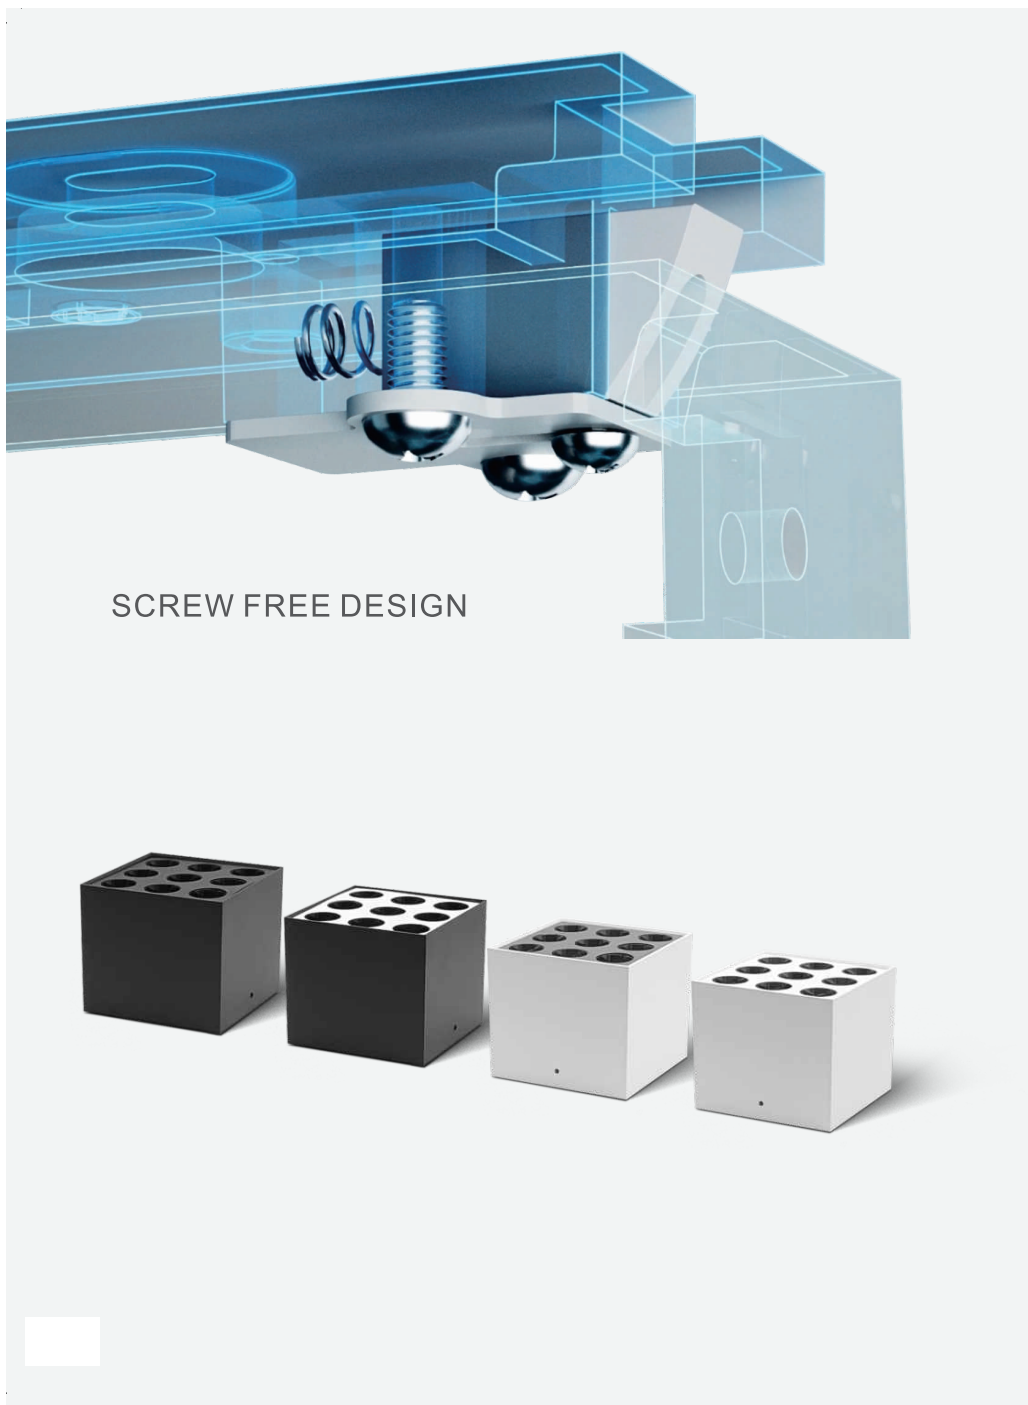

046M-TD-96

LED Chip:SMD
Size: 96x96 x H83mm
Input: 220~240VAC
Wattage: 20W
Beam Angel: 15°/24°/38°
CCT: 2700-5500K
IP Rating:IP20
RA:90



Fixed



Certificate
mark



IP rating





Different light distribu-
tions



Tri-color



Excellent visual
comfort

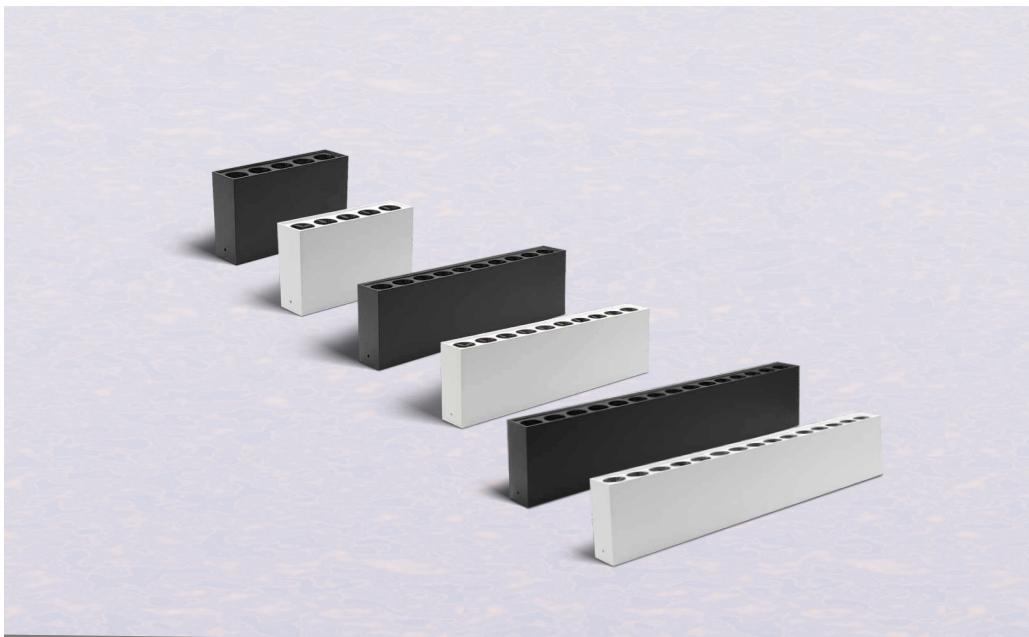

052M-XTD-05

LED Chip: SMD
Size: 138x36x83mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA≥90



Fixed



Certificate
mark



IP rating





Different light distribu-
tions



Tri-color



Excellent visual
comfort



052M-XTD-10

LED Chip: SMD
Size: 272x36x83mm
Input: 220~240VAC
Wattage: 20W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA≥90



Fixed



Certificate mark



IP rating





Different light distributions



Tri-color



Excellent visual comfort

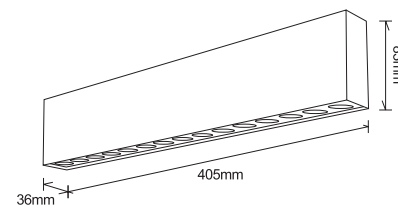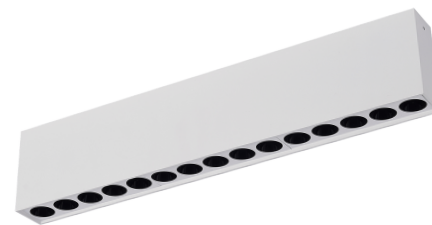

046M-TD-185

LED Chip: SMD
Size: 405x36x83mm
Input: 220~240VAC
Wattage: 30W
Beam Angle: 15°/24°/36°
CCT: 2700-5500K
RA≥90



Fixed



Certificate mark



IP rating




Different light distributions



Tri-color




Excellent visual comfort



ROCA-CL-DOT05

LED Chip: SMD
Size: 136x35x70mm
Input: 100~240VAC
Wattage: 10W
Beam Angle: 30°/45°
CCT: 2700-5500K
RA ≥ 90

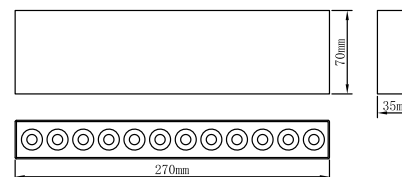

ROCA-CL-DOT10

LED Chip: SMD
Size: 270x35x70mm
Input: 100~240VAC
Wattage: 20W
Beam Angle: 30°/45°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color




Excellent visual
comfort



047M-TDA-10W

LED Chip: SMD
Size: $\varnothing 82 \times 67$ mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 24°
CCT: 2700-5500K
RA ≥ 90



047M-TDF-10W

LED Chip: SMD
Size: $\varnothing 82 \times 50 + 50$ mm
Input: 220~240VAC
Wattage: 10W
Beam Angle: 24°
CCT: 2700-5500K
RA ≥ 90



Fixed



Certificate
mark



IP rating





Different light distribu-
tions



Tri-color



Excellent visual
comfort



017M-SD-08

LED Chip: COB
Size: Φ75x100mm
Input: 220~240VAC 50/60Hz
Wattage: 8/12W
Beam Angel: 24°/50°
CCT: 2700-5500K
RA≥90



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color



Excellent visual
comfort



017M-XQ-08

LED Chip: COB
Size: Φ75x100mm
Input: 220~240VAC 50/60Hz
Wattage: 8/12W
Beam Angel: Wallwasher
CCT: 2700-5500K
RA≥90



Fixed



Certificate
mark



IP rating



Different light distribu-
tions



Tri-color




Excellent visual
comfort

Bamboo



Bamboo



020098

LED Chip: COB
Size: $\phi 80 \times 160$ mm
Input: 220~240VAC 50Hz/60Hz
Wattage: 12W/15W
Beam Angle: 15°/24°/38°/60°
CCT: 2700-5500K
RA $\geq$ 90



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Tri-color




Excellent visual
comfort



ROCA-CL1107

LED Chip: COB
 Size: $\phi 75 \times 95\text{mm}$
 Input: 220~240VAC 50Hz/60Hz
 Wattage: 8-12W
 Beam Angle: 24°
 CCT: 2700-5500K
 RA ≥ 90



ROCA-CL1104

LED Chip: COB
 Size: $\phi 98 \times 110\text{mm}$
 Input: 220~240VAC 50Hz/60Hz
 Wattage: 20W
 Beam Angle: 24°
 CCT: 2700-5500K
 RA ≥ 90



Fixed



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Fixed



Certificate mark



IP rating




Different light distributions



Tri-color



Excellent visual comfort

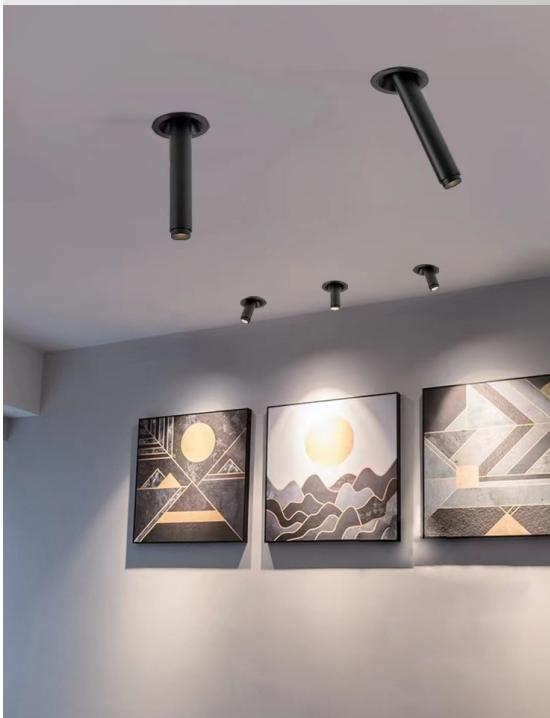

texto
texto



ROCA-22-9W

LED Chip: COB
Size: Ø35 x H210mm
Cutout: Ø75mm
Input: 220~240VAC 50/60Hz
Wattage: 9W
Beam Angel: 15-60°
CCT: 2700-5500K
IP Rating: IP20
RA:90



Ø75mm



Adjustable



Certificate
mark



IP Rating




Different light distribu-
tions




Excellent
thermal
management



Excellent visual
comfort

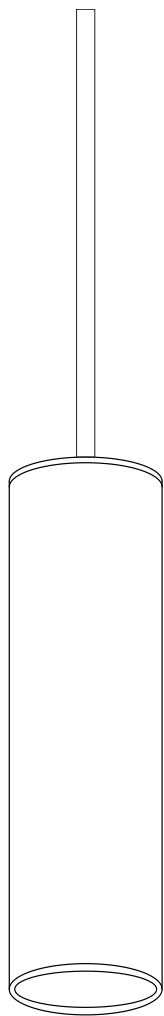

Pendant



ROCA60

LED Chip: GU10
Size: Ø60 x H300mm
Color: Black/White
Lamp Material: Aluminum
Wattage: MAX.50W
IP Rating: IP20
Install: Pendant

BK ■ WH □



Fixed



Certificate
mark



IP rating




Different light distribu-
tions



Excellent
thermal
management




Excellent visual
comfort



ROCA-64-10W-WH

LED Chip: SMD
Size: 136x35x70mm
Input: 100~240VAC
Wattage: 10W
Beam Angle: 30°/45°
CCT: 2700-5500K
RA ≥ 90



ROCA-64-10W-BK

LED Chip: SMD
Size: 136x35x70mm
Input: 100~240VAC
Wattage: 10W
Beam Angle: 30°/45°
CCT: 2700-5500K
RA ≥ 90

